


# SMART METERS AND AMR APPLICATION BRIEF

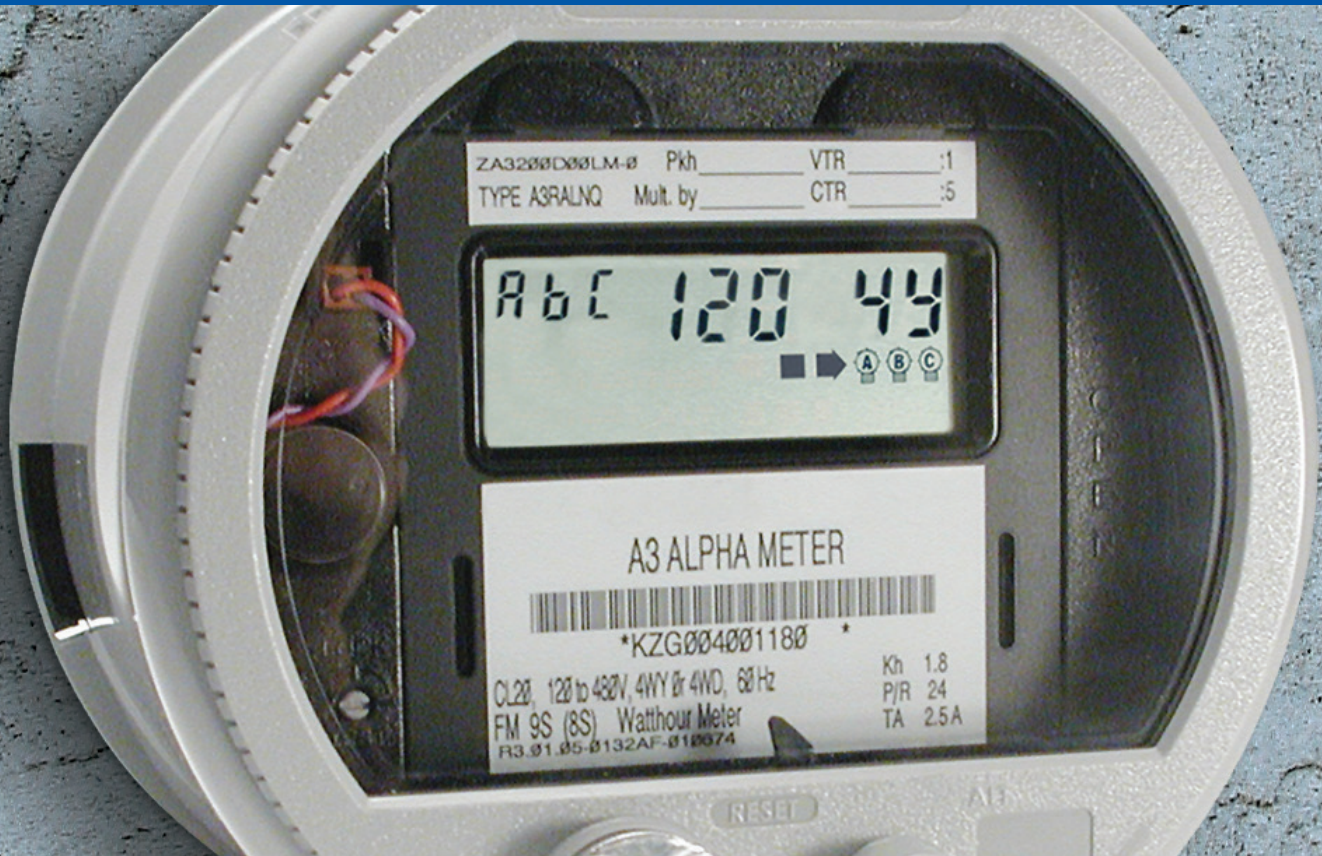

**Keep data flowing, even when power isn't.** The smart grid requires next-generation metrology and sensing to provide utilities and customers accurate and fail-safe data communication from an ever-increasing number of locations.

The demand for enhanced connectivity, dependability and security is rapidly driving the development of more powerful, outage-proof smart meter and AMR technologies based on Maxwell ultracapacitors. Maxwell is proud to offer an extensive product line to address the robust needs of the metering market, enabling key functionality such as data delivery even when power is lost. Benefits of Maxwell ultracapacitors in gas, water, and electricity smart meters include:

- Keep critical information and functions accessible in the event of primary power loss
- XP™: Extended performance in a high temperature and high humidity environment†
- Reduce or eliminate battery maintenance and replacement costs
- Compliant with UL, RoHS, and REACH requirements
- Long lifetime and reliable operation in temperatures ranging from  $-40^{\circ}$  to  $+85^{\circ}\text{C}$  with derated voltage down from 2.7V to 2.3V\*

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.

†Based on results from biased humidity testing.

## Ultracapacitors

Ultracapacitors are energy storage devices that provide burst power for applications requiring high power functions. Unlike batteries, which store energy via chemical reaction, ultracapacitors store energy by electrostatically (physically) separating positive and negative charges. The ultracapacitor's electrostatic energy storage permits the device to be rapidly charged and discharged for hundreds of thousands of cycles\*, as compared to batteries, which typically perform only thousands of charge/discharge cycles. Ultracapacitors are a reliable, energy-efficient and cost-effective solution for storing energy.

## Background

Maxwell Technologies is the global leader in ultracapacitor technology and is changing the way energy is used and stored, with over 100 million cells deployed in the field into applications such as grid energy storage, renewable energy generation, automotive, and consumer electronics. Our global R&D, manufacturing, and field support capabilities allow us to deliver unsurpassed value to our customers from early design to solution launch.



## Specifications

Model Number	BCAP0003 P270 X01	BCAP0005 P270 X01	BCAP0010 P270 X01	BCAP0025 P270 X01	BCAP0050 P270 X01
Part Number	133513	133515	133517	133519	133521
Min Cap. Initial (F)	2.7	4.5	9	22.5	45
Maximum ESR <sub>DC</sub> , Initial (mΩ)	70	45	30	25	16
Leakage Current at 25°C, Max. (mA)	0.005	0.008	0.023	0.049	0.073
Impedance Match Specific Power, P <sub>max</sub> (W/kg)	18,600	19,200	19,500	10,800	9,300
Specific Energy, E <sub>max</sub> (Wh/kg)	2.1	2.4	3.2	3.7	4.1

\*Results may vary. Additional terms and conditions, including the limited warranty, apply at the time of purchase. See the warranty details for applicable operating and use requirements.

Please contact Maxwell Technologies directly for any technical specifications critical to application. Products and related processes may be covered by one or more U.S. or international patents and pending applications. Please see [www.maxwell.com/patents](http://www.maxwell.com/patents) for more information.

**Maxwell Technologies, Inc.**  
**Global Headquarters**  
 3888 Calle Fortunada  
 San Diego, CA 92123  
 USA  
 Tel: +1 (858) 503-3300  
 Fax: +1 (858) 503-3301

**Maxwell Technologies SA**  
 Route de Montena 65  
 CH-1728 Rossens  
 Switzerland  
 Tel: +41 (0)26 411 85 00  
 Fax: +41 (0)26 411 85 05

**Maxwell Technologies, GmbH**  
 Leopoldstrasse 244  
 80807 Munich  
 Germany  
 Tel: +49 (0)89 4161403 0  
 Fax: +49 (0)89 4161403 99

**Maxwell Technologies  
 Shanghai Trading Co. Ltd.**  
 Room 1005, 1006, and 1007  
 No. 1898, Gonghexin Road,  
 Jin An District, Shanghai  
 200072, P.R. China  
 Tel: +86 21 3852 4000  
 Fax: +82 21 3852 4099

**Nesscap Co., Ltd.**  
 17, Dongtangiheung-ro  
 681 Beon-gil, Giheung-gu,  
 Yongin-si, Gyeonggi-do  
 17102, Republic of Korea  
 Tel: +82 31 289 0721  
 Fax: +82 31 286 6767

MAXWELL TECHNOLOGIES, MAXWELL, MAXWELL CERTIFIED INTEGRATOR, ENABLING ENERGY'S FUTURE, NESSCAP, XP, DURABLU, BOOSTCAP, D CELL, CONDIS and their respective designs and/or logos are either trademarks or registered trademarks of Maxwell Technologies, Inc., and/or its affiliates, and may not be copied, imitated or used, in whole or in part, without the prior written permission Maxwell Technologies, Inc. All contents copyright © 2018 Maxwell Technologies, Inc. All rights reserved. No portion of these materials may be reproduced in any form, or by any means, without prior written permission from Maxwell Technologies, Inc.

Document number: 3001081-EN.3 [maxwell.com](http://maxwell.com)